


# 1102-05 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108 CONCEALED  
ELECTRIC THROUGH WIRE HINGE

FOR USE WITH MCKINNEY

4.5" FULL MORTISE 3 AND 5 KNUCKLE BALL BEARING  
HINGES STANDARD WEIGHT

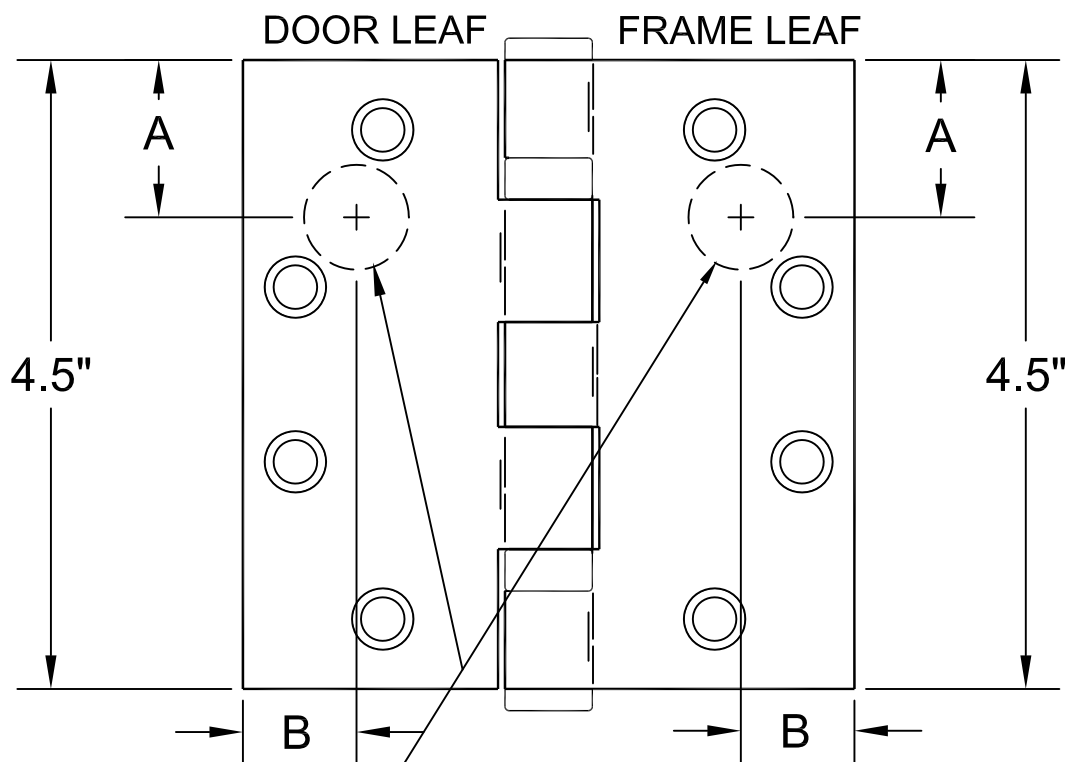

DRILL & DEBURR 3/4" DIA. HOLE IN  
FRAME REINFORCEMENT AND DOOR  
FOR WIRES. WOOD FRAME AND DOOR  
APPLICATION REQUIRES 2" MINIMUM  
DEPTH.

HINGE TYPE	(A) DIMENSION WIRE PREP LOCATION	(B) DIMENSION WIRE PREP LOCATION
3 KNUCKLE STANDARD WEIGHT	1.125"	.812"
5 KNUCKLE STANDARD WEIGHT	1.125"	.688"



HINGES ARE NON-LOAD BEARING  
AND MUST BE MOUNTED  
IN THE CENTER POSITION ONLY.