


1102-06 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108 CONCEALED
ELECTRIC THROUGH WIRE HINGE

FOR USE WITH MCKINNEY

4.5" FULL MORTISE 3 AND 5 KNUCKLE BALL BEARING
HINGES HEAVY WEIGHT

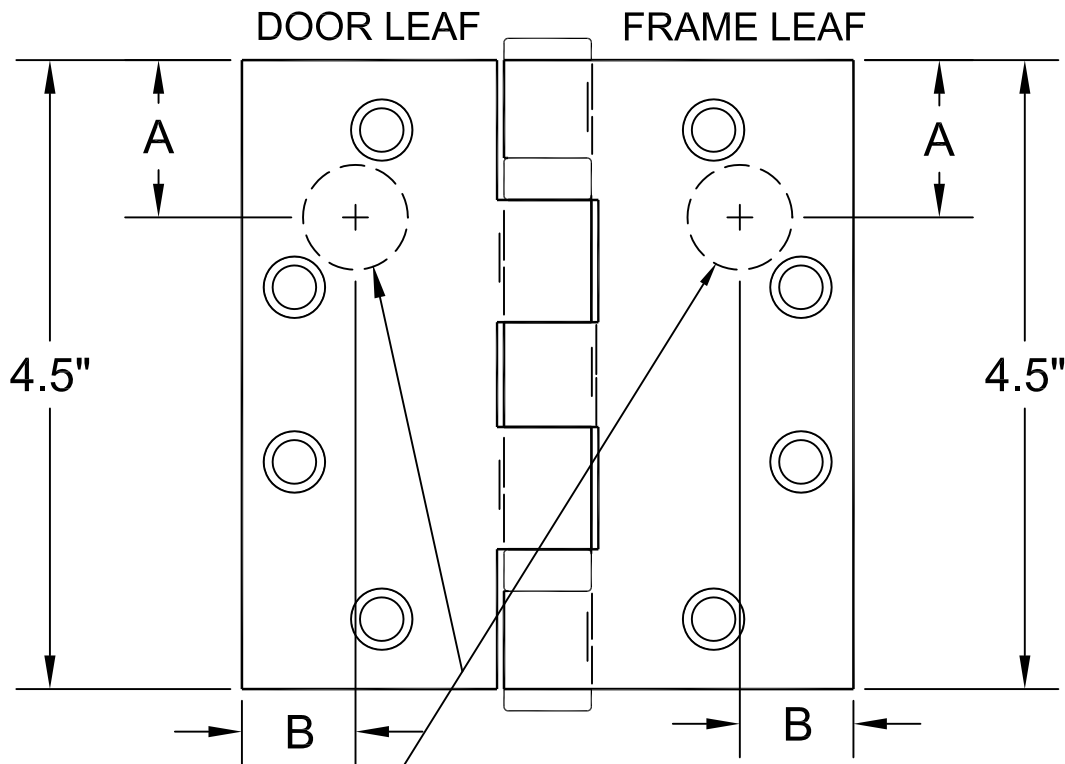

DRILL & DEBURR 3/4" DIA. HOLE IN
FRAME REINFORCEMENT AND DOOR
FOR WIRES. WOOD FRAME AND DOOR
APPLICATION REQUIRES 2" MINIMUM
DEPTH.

HINGE TYPE	(A) DIMENSION WIRE PREP LOCATION	(B) DIMENSION WIRE PREP LOCATION
3 KNUCKLE HEAVY WEIGHT	1.125"	.812"
5 KNUCKLE HEAVY WEIGHT	1.062"	.750"



HINGES ARE NON-LOAD BEARING
AND MUST BE MOUNTED
IN THE CENTER POSITION ONLY.