


1102-07 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108 CONCEALED
ELECTRIC THROUGH WIRE HINGE

FOR USE WITH MCKINNEY

5.0" FULL MORTISE 3 AND 5 KNUCKLE BALL BEARING
HINGES STANDARD WEIGHT

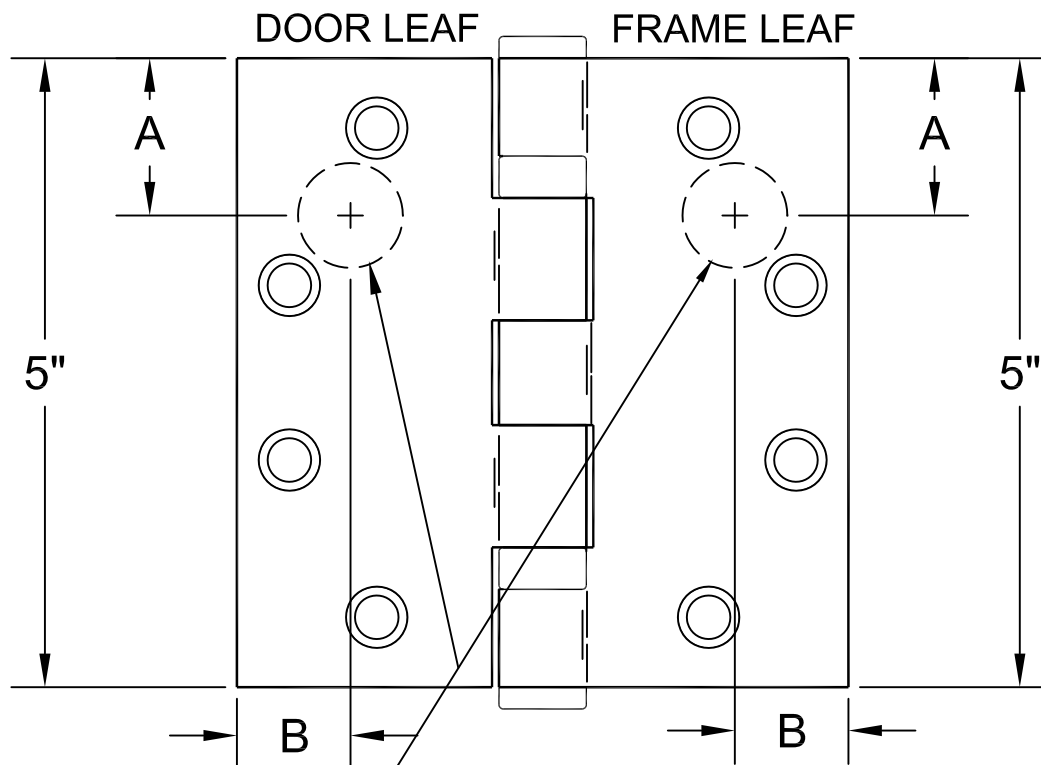

DRILL & DEBURR 3/4" DIA. HOLE IN
FRAME REINFORCEMENT AND DOOR
FOR WIRES. WOOD FRAME AND DOOR
APPLICATION REQUIRES 2" MINIMUM
DEPTH.

HINGE TYPE	(A) DIMENSION WIRE PREP LOCATION	(B) DIMENSION WIRE PREP LOCATION
3 KNUCKLE STANDARD WEIGHT	1.125"	.812"
5 KNUCKLE STANDARD WEIGHT	1.125"	.812"



HINGES ARE NON-LOAD BEARING
AND MUST BE MOUNTED
IN THE CENTER POSITION ONLY.