

# 1102-09 HINGE TEMPLATE


MODEL 1100-10, 1100-12, 1102X4, 1108-26, 1100-PG  
1182, 1182X4 AND 1182X6

CONCEALED ELECTRIC THROUGH WIRE HINGE

FOR USE ON ALL MANUFACTURERS

4.5" FULL MORTISE 5 KNUCKLE BALL BEARING


HINGES STANDARD AND HEAVY WEIGHT

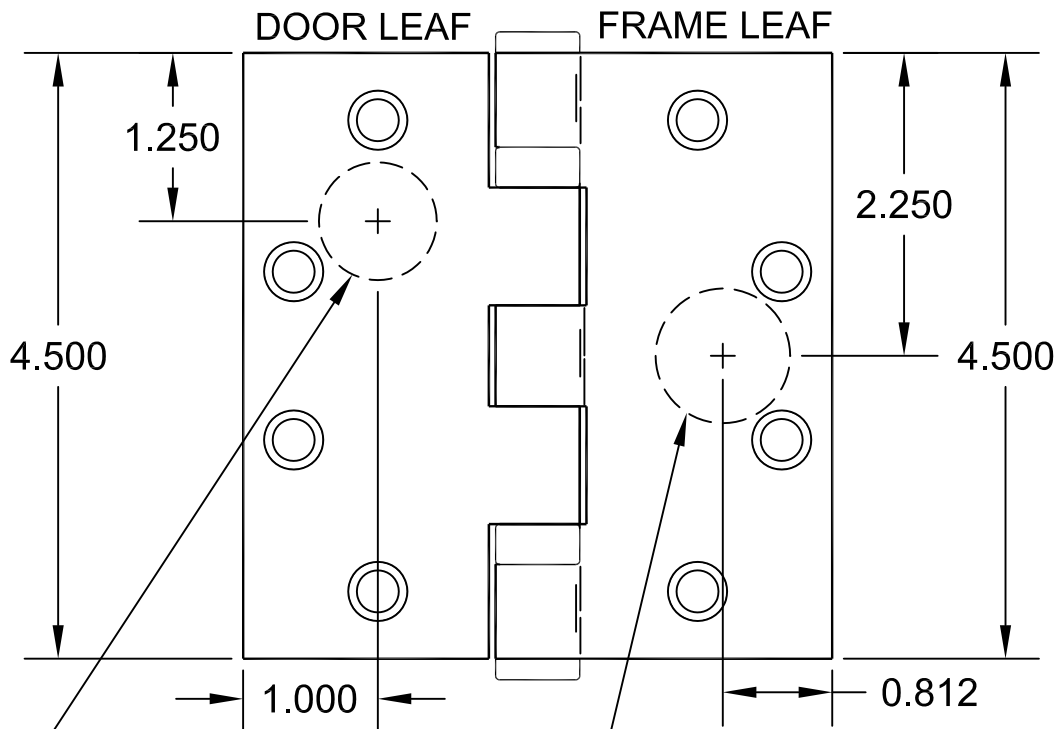


DRILL & DEBURR 7/8" DIA. HOLE IN DOOR FOR WIRES. DRILL HOLE PER DOOR HANDING. WOOD DOOR APPLICATION REQUIRES 2" MINIMUM DEPTH.

DRILL & DEBURR 1" DIA. HOLE IN FRAME REINFORCEMENT FOR WIRES. WOOD FRAME APPLICATION REQUIRES 2" MINIMUM DEPTH.

HINGES ARE SHOWN FROM THE FRONT SIDE. HAND HINGE AS SHOWN.

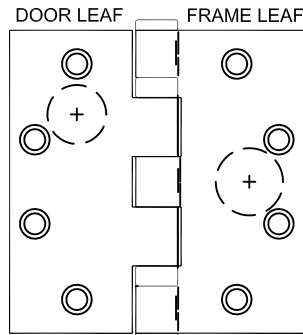

RIGHT HAND HINGE

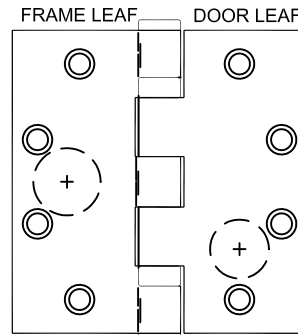

LEFT HAND HINGE



**ARCHITECTURAL  
CONTROL SYSTEMS,  
INCORPORATED**

HINGES ARE NON-LOAD BEARING AND MUST BE MOUNTED IN THE CENTER POSITION ONLY.