


# 1102-12 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108 CONCEALED  
ELECTRIC THROUGH WIRE HINGE

FOR USE WITH STANLEY

4.5" FULL MORTISE 3 KNUCKLE BALL BEARING  
HINGES STANDARD AND HEAVY WEIGHT

FOR RIGHT HAND HINGES DRILL  
& DEBURR (2) 3/4" DIA. HOLES  
IN DOOR AND FRAME REINFORCEMENT  
FOR WIRES AS SHOWN.

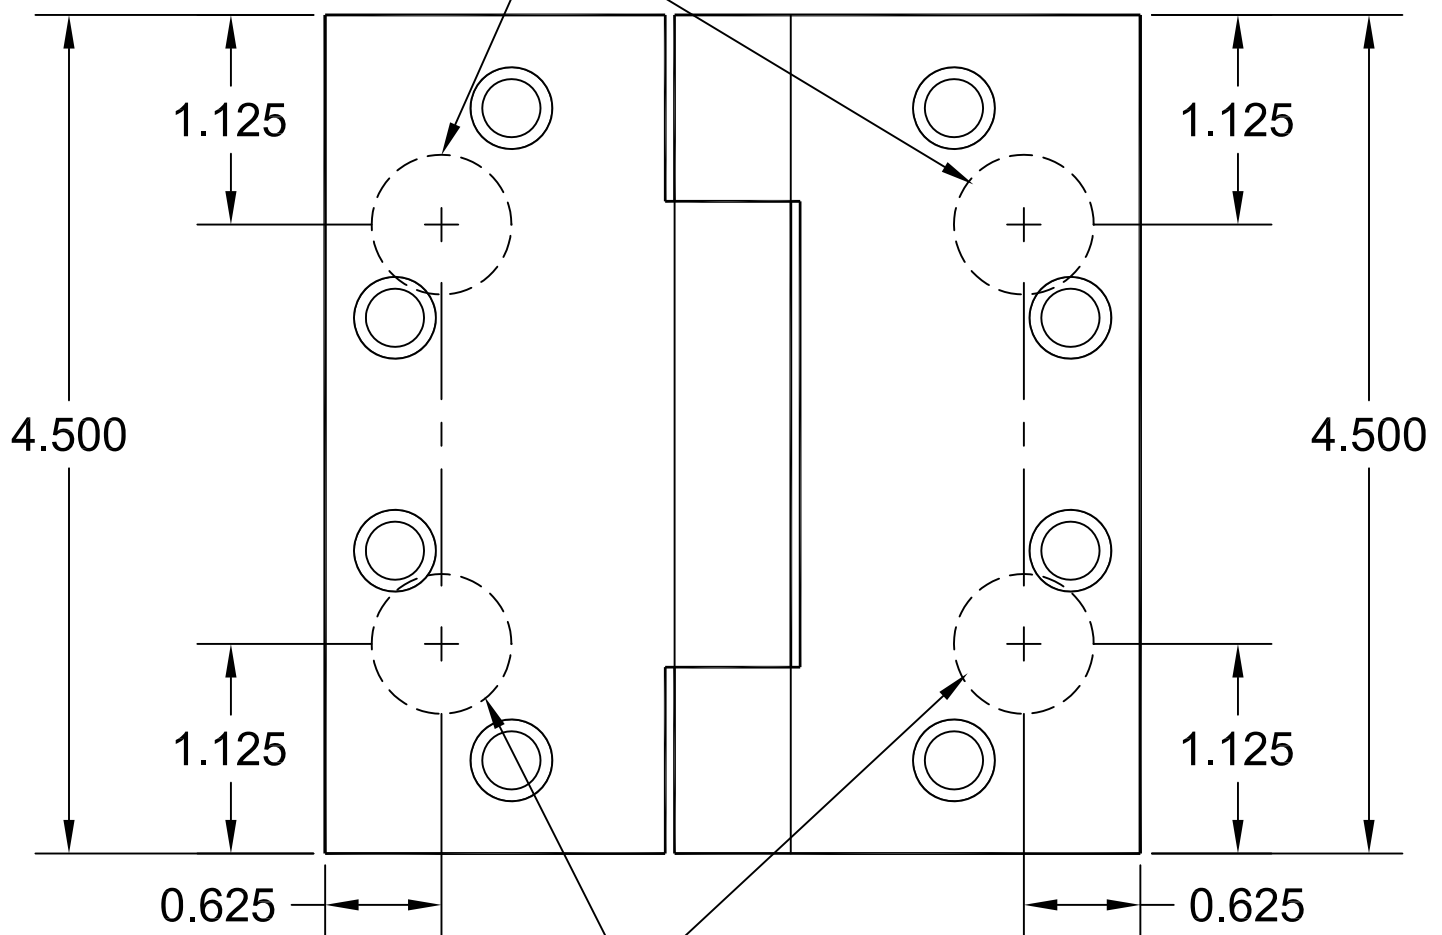

NOTE: WOOD FRAME AND DOOR  
APPLICATION REQUIRES 2"  
MINIMUM DEPTH.

FOR LEFT HAND HINGES DRILL  
& DEBURR (2) 3/4" DIA. HOLES  
IN DOOR AND FRAME REINFORCEMENT  
FOR WIRES AS SHOWN.



HINGES ARE NON-LOAD BEARING  
AND MUST BE MOUNTED  
IN THE CENTER POSITION ONLY.