


1102-33 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108 CONCEALED
ELECTRIC THROUGH WIRE HINGE

FOR USE WITH HAGER AND IVES

4.5" X 6.0" WIDE THROW FULL MORTISE 5 KNUCKLE
BALL BEARING HINGES STANDARD AND HEAVY WEIGHT

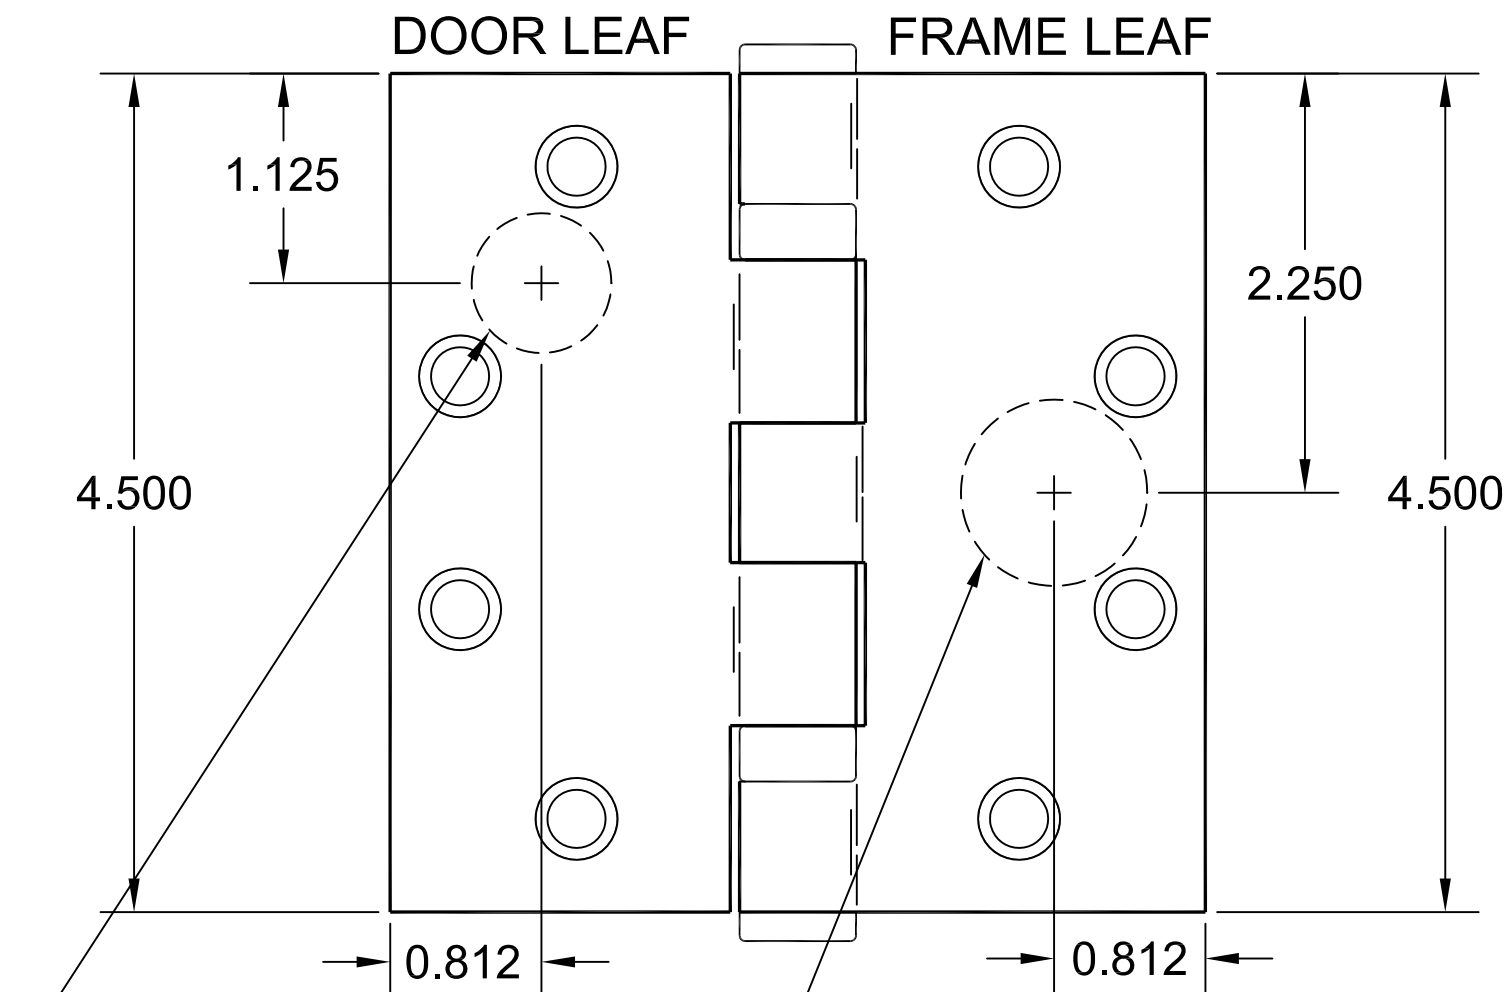

DRILL & DEBURR 3/4" DIA. HOLE
IN DOOR FOR WIRES. WOOD DOOR
APPLICATION REQUIRES 2" MINIMUM
DEPTH.

DRILL & DEBURR 1" DIA. HOLE
IN FRAME REINFORCEMENT
FOR WIRES. WOOD FRAME
APPLICATION REQUIRES 2"
MINIMUM DEPTH.



HINGES ARE NON-LOAD BEARING
AND MUST BE MOUNTED
IN THE CENTER POSITION ONLY.