


1103-02 HINGE TEMPLATE

MODEL 1114, 1116, 1118 & 1120 CONCEALED ELECTRIC THROUGH WIRE & MONITOR & CONCEALED AIR TRANSFER

FOR USE WITH ALL MANUFACTURERS

5.0" FULL MORTISE 5 KNUCKLE BALL BEARING
HINGES STANDARD AND HEAVY WEIGHT

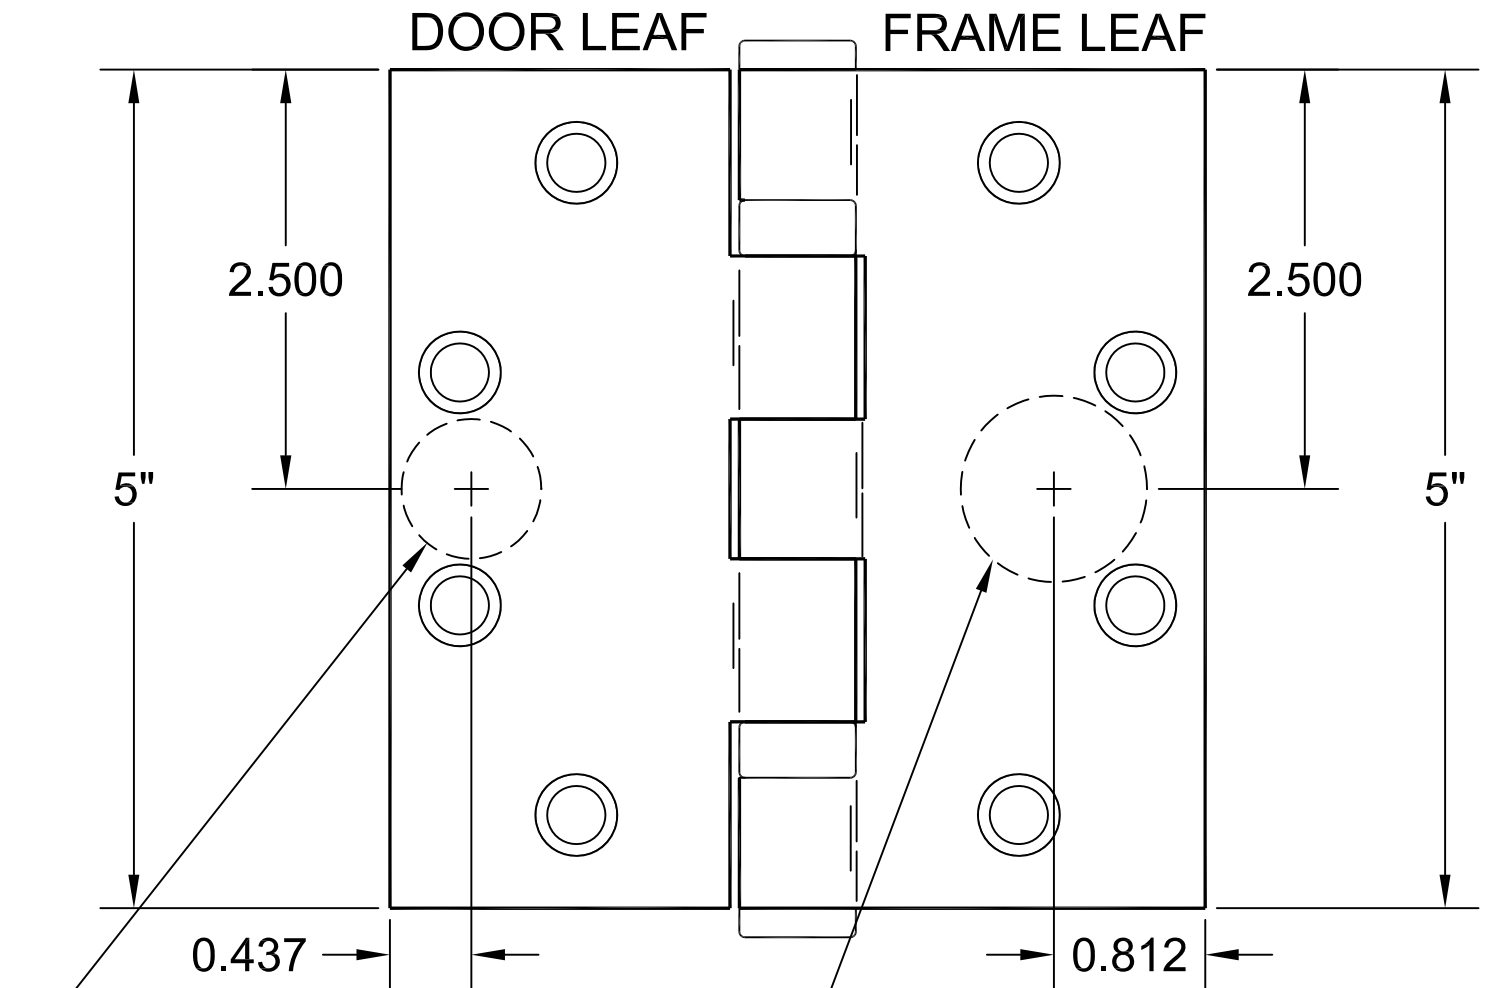

DRILL & DEBURR 3/4" DIA. HOLE
IN DOOR FOR WIRES. WOOD DOOR
APPLICATION REQUIRES 2" MINIMUM
DEPTH.

DRILL & DEBURR 1" DIA. HOLE
IN FRAME REINFORCEMENT
FOR WIRES. WOOD FRAME
APPLICATION REQUIRES 2"
MINIMUM DEPTH.



HINGES ARE NON-LOAD BEARING
AND MUST BE MOUNTED
IN THE CENTER POSITION ONLY.